

SUPERIOR PUMP

BUILT TO LAST

POOL PRODUCTS

POOL COVER PUMP

AUTOMATIC ON/OFF

92395 FEATURES

- **2100 GPH@0'**
- Thermoplastic construction with built-in handles for ease of transport and installation
- 1" NPT discharge
- 3/4" garden hose adapter
- Activates in 1-1/2" of water
- Large base design for added stability
- Bottom screen removes easily for cleaning
- Internal automatic vertical float switch
- Hermetically sealed, oil cooled motor for long pump life
- Clog resistant impeller
- Motor is thermally protected with automatic reset thermal protector
- Energy efficient split capacitor motor. Lower amp draw, runs cooler, lasts longer
- Stainless steel motor shaft
- Carbon/ceramic/stainless steel mechanical shaft seal
- Upper and lower permanently lubricated ball bearings
- Stainless steel fasteners
- Acceptable for indoor or outdoor use
- Compact, lightweight design is easily portable
- Every unit is 100% pressure tested



**3 YEAR
WARRANTY**

**2100
GALLONS PER HOUR**



POOL COVER PUMP

AUTOMATIC ON/OFF



LISTED
E238091

92395 - Application

Submersible pool cover pump

Motor Specifications

| | |
|----------------------|---------------------------------------|
| Voltage | 120 |
| Amps | 3.8 |
| Hertz | 60 Hz |
| Phase | Single |
| RPM | 3450 RPM |
| Motor Type | Permanent Split Capacitor (PSC) |
| Insulation | Class A |
| Circuit Requirements | 15 amp (min) individual circuit |
| Duty Rating | Continuous* |
| Shaft Seal | Carbon/ceramic and stainless steel |
| Motor Shaft | Stainless Steel |
| Upper Motor Bearing | Ball Bearing |
| Lower Motor Bearing | Ball Bearing |
| Cooling | Oil cooled |
| Motor Protection | Auto reset thermal overload protector |

*For continuous operation, the water depth must be at least 1-1/2" to prevent the motor from overheating.


Pump Specifications

| | |
|--------------------|-----------------------------------|
| Discharge Size | 1" NPT & 3/4" Garden hose thread |
| Cord Length | 25' |
| Cord Type | SJTW, UL listed, 3-wire, 18 gauge |
| Pump Housing | Thermoplastic |
| Pump Base | Thermoplastic |
| Impeller Material | Thermoplastic |
| Impeller Type | Clog resistant |
| Gasket | Buna-N |
| Liquid Temp. Range | 32°- 120° F |
| Operation | Automatic |
| Fasteners | Stainless steel |
| Max Flow Rate | 35 Gallons per minute |
| Maximum Head | 25 feet |
| Max Pressure | 10.8 psi |
| Weight | 11.0 lbs |

Automatic Switch Specifications

| | |
|------------------|---|
| Type | Internal SJE Rhombus Vertical Master II |
| Switch on point | 1-1/2" |
| Switch off point | 3/4" |
| Material | High impact PVC |

Performances

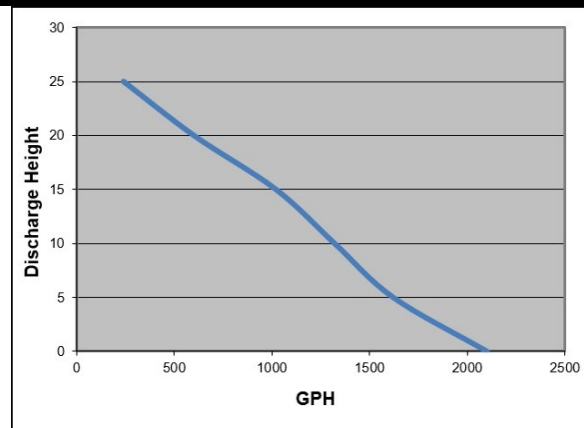

| Discharge Height | 0' | 5' | 10' | 15' | 20' | 25' |
|--------------------|------|------|------|------|-----|-----|
| Gallons Per Minute | 35 | 27 | 20 | 17 | 10 | 4 |
| Gallons Per Hour | 2100 | 1620 | 1200 | 1020 | 600 | 240 |

Dimensions

